


## Option

- ✓ Maximum of 16 units can be connected

Easy Axis Settings



Toolless 16 Unit-Connection Board



- ✓ Remote Monitoring



iOS / Android



- ✓ Signal Tower Light (Exclusive Connector)

No Program Needed, Easy Connection



- ✓ Mounting Stand A



### ① Measuring Cylinder

Measuring range	Stem Dia.	Model name	-□ Controller
Range 25mm Type	Φ19mm	SCN-3M2-025-□	S: 3.5in QVGA
Range 50mm Type		SCN-5M2-050-□	
Range 100mm Type		SCN-5M2-100-□	
Range 150mm Type	Φ30mm	SCN-5M2-150-□	Z: Without controller
Range 200mm Type		SCN-5M2-200-□	
Range 250mm Type		SCN-5M2-250-□	

### ② Option

商品名	品番
Signal Tower Lights	STL3
Remote Monitoring System	RMS1
16 Unit- Connection Board	CB16
Mounting Stand A Stem Φ19mm	ST19
Mounting Stand B Stem Φ30mm	ST30
Master gauge (50mm)	MG50

※USB memory stick is required for saving measurement data.

Touch Panel Measuring Cylinder




《Patent Pending》

# Smart Touch Sizer

Measure Man 2

※ Specifications may differ from the actual product.

Production Site Dimensional Inspection Made Easy

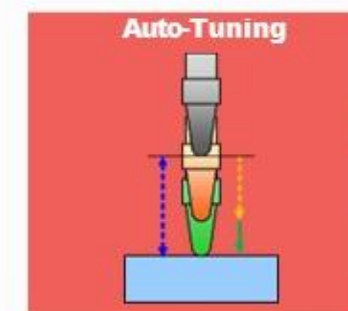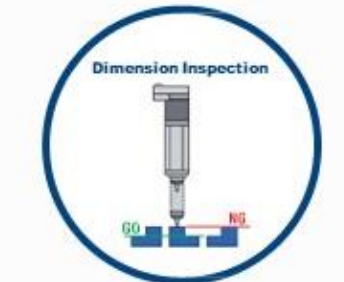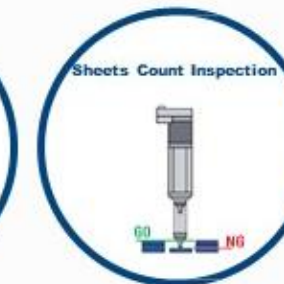

Measure Man 2 Image



**Long stroke  
250mm**

※SCN-5M2-250



**No Programming  
Needed**



**Resolution  
±0.01mm**

# No Operation Manual Needed



✓ Easy Operation

✓ Multilingual


✓ Auto-Tuning

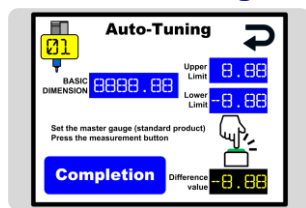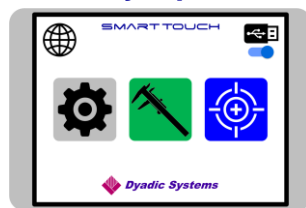



✓ Inspection Result In-A-Glance

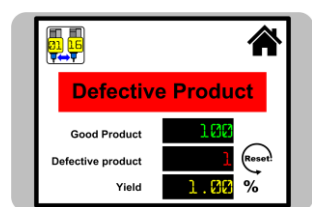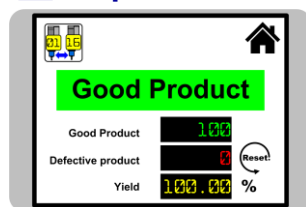

✓ Data Auto-Saving in USB Memory

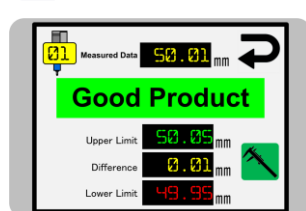


✓ Easy Measurement Data Analysis (EXCEL Sample Data Provided)

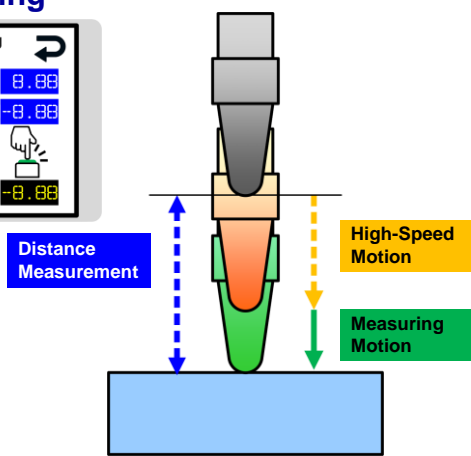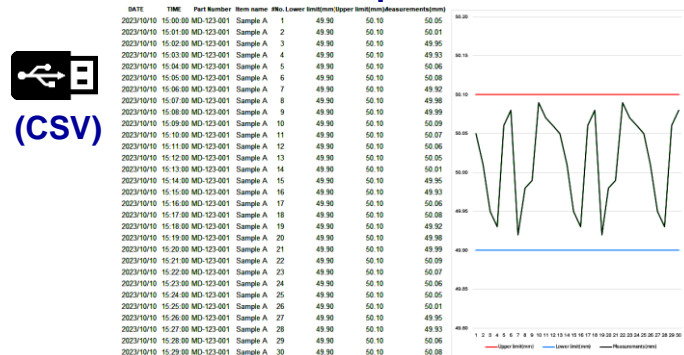

Optimal measuring parameters can be set by just placing the master workpiece then pushing the start button.

## Ready-to-Use Package Basic Package


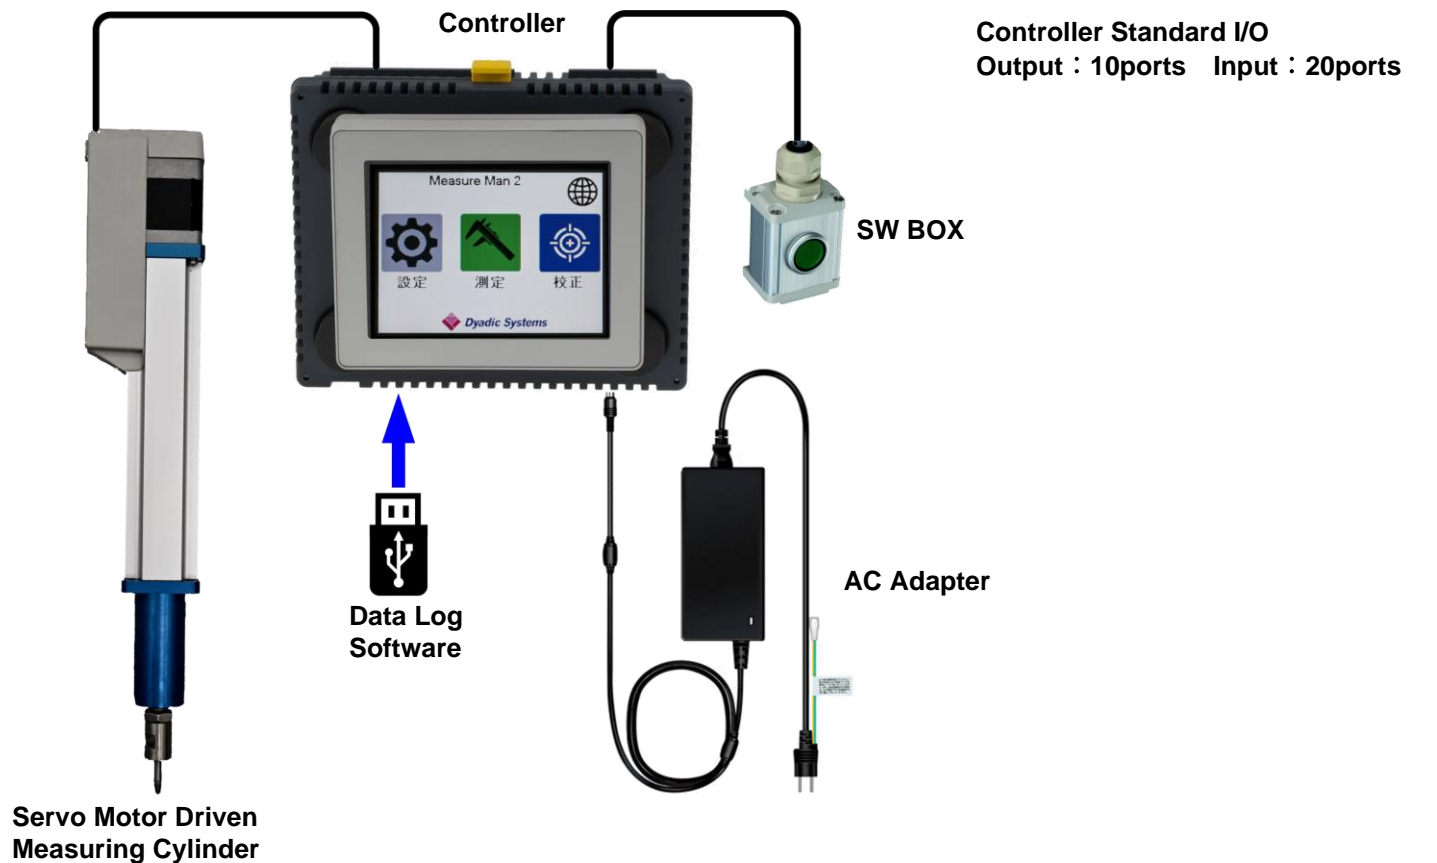


Servo Motor Driven  
Measuring Cylinder

Controller Standard I/O  
Output : 10ports Input : 20ports

## Ultra-Low Impact Upon Contact

✓ Significantly reduced vibration time upon contact.

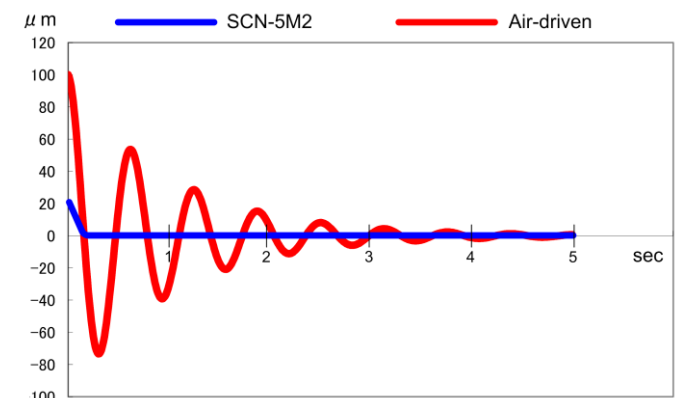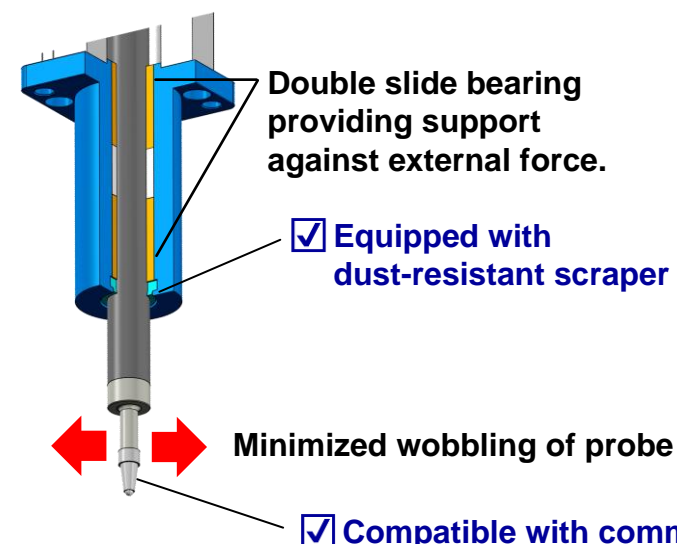

✓ Compatible with commercially available probes.

